

Now Renting

BIL-JAX®

3632T Telescopic Boom Lift



Features

Automatic Leveling System

A self-leveling system provides quick and easy set-up in less than 30 seconds.

Hydraulic Outriggers

Optimized outrigger geometry provides industry leading leveling capability.

Working Envelope and Outreach

The telescopic boom design offers exceptional outreach and working envelope and is easier to operate compared to conventional articulating booms.

Easy to Use

Both the platform and ground control station feature an easy-to-understand display panel with control buttons that are logically positioned around a single machine image for easy identification of button functions.


Easy to Transport

The boom is easily towed with a Class 3 2" ball hitch. Convenient integrated forklift pockets are also provided.

Additional Features

Outrigger interlocks and tilt alarm/sensor • Multiple control function speeds • 110/60 GFI outlet in platform • Hour meter and battery condition indicator

See back page for specifications

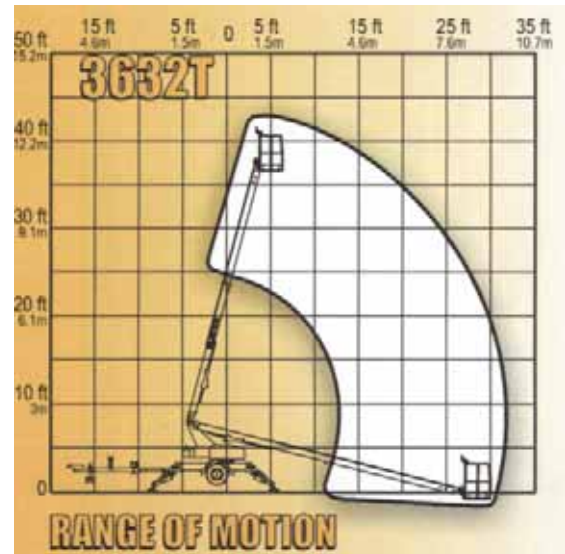

RENTAL RATES

Day	\$175
Week	\$525
Month	\$1,675

www.MQB.com

McQuade & Bannigan Inc.

sales@MQB.com

Utica

1300 Stark St. • Utica, NY 13502
Ph: (315) 724-7119 • Fax: (315) 724-0171


Watertown

22696 Murrock Circle • Watertown, NY 13601
Ph: (315) 788-2612 • Fax: (315) 785-0361

Syracuse

6300 E. Molloy Rd. • E. Syracuse, NY 13057
Ph: (315) 671-4400 • Fax: (315) 671-4404

3632T Telescopic Boom Lift Specifications

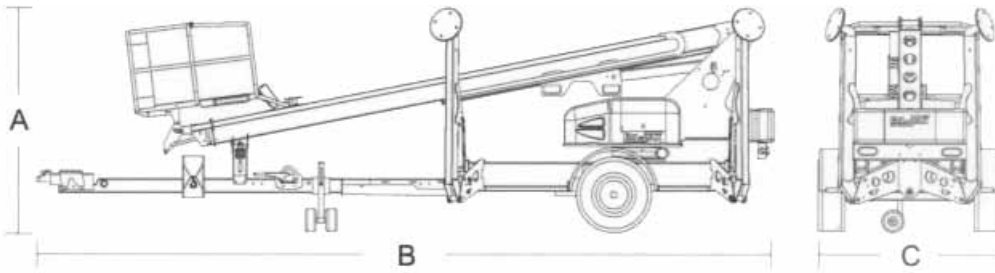

Specifications	US	Metric
Working Height ¹	43 ft. 6 in.	13.4 m
Maximum platform height ²	37 ft. 6 in.	11.4 m
Horizontal outreach		
Maximum (from centerline)	32 ft.	9.8 m
Maximum (from edge of footpad)	27 ft.	8.2 ft.
Turntable rotation	360° continuous	
Load capacity	500 lbs.	227 kg
(A) Height - stowed	76¾ in.	195 cm
(B) Length - stowed	21 ft. 11 in.	6.7 m
(C) Width - stowed	5 ft. 5 in.	165 cm
Height - platform	43 in.	109 cm
Length - platform	30 in.	76 cm
Width - platform	48 in.	122 cm
Outrigger type	Hydraulic	
Leveling system	Auto leveling	
Leveling capacity	12°	
Outrigger footprint - length	12 ft. 2 in.	3.7 m
Outrigger footprint - width	11 ft. 3½ in.	3.4 m
Footpad diameter	12½ in.	32 cm
Tow speed rating	65 mph	105 km/h
Tongue weight	160 lbs.	73 kg
Overrun brakes	Standard	
Parking brake	Standard	
Tire size	ST 225/75 R15D	
Standard control system	24V DC	
Batteries	(4) 6V 245 amp hr.	
Charger	40 amp	
Total weight ³	4,200 lbs.	1,905 kg

¹The metric equivalent of working height adds 2 m to the maximum platform height. U. S. adds 6 ft. to the maximum platform height.

²Maximum platform height when outriggers re fully extended on a level surface.

³weight will vary depending on options and/or market destination.